

FLUE PENETRATION

AS/NZS2918-2001

Un-tested flue with sloped ceiling penetration greater than 30° from horizontal.


4.5.1(b)=50mm clearance to combustible material

A=50mm for 200mm Ø flue pipe

A=62.5mm for 225mm Ø flue pipe

4.6.3(b)

Downward distance of casing and 3xØ flue distance of the ceiling plate

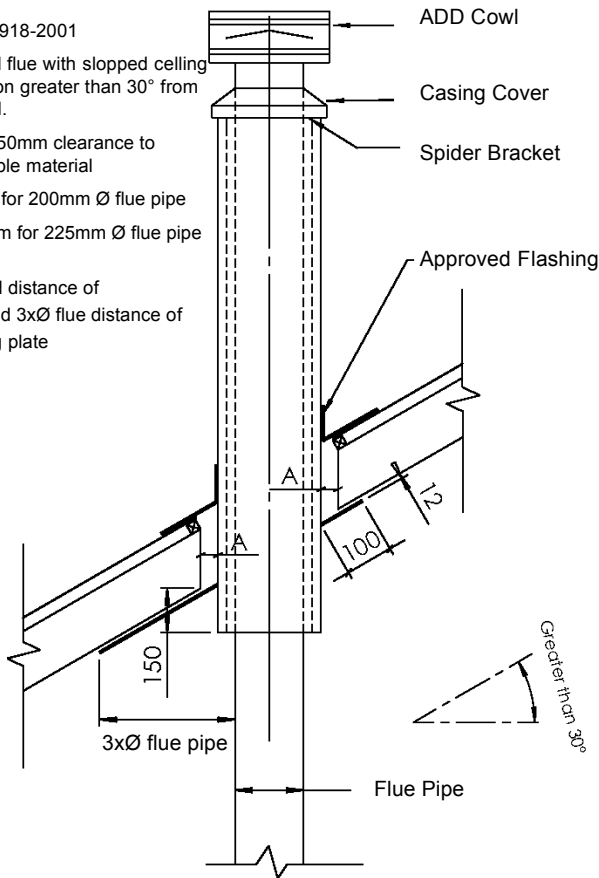

AS/NZS2918-2001

Un-tested flue with sloped ceiling penetration greater than 30° from horizontal.


4.5.1(b)=50mm clearance to combustible material

A=50mm for 200mm Ø flue pipe

A=62.5mm for 225mm Ø flue pipe

4.6.3(b)

3xØ flue from active flue to heel sensitive surface

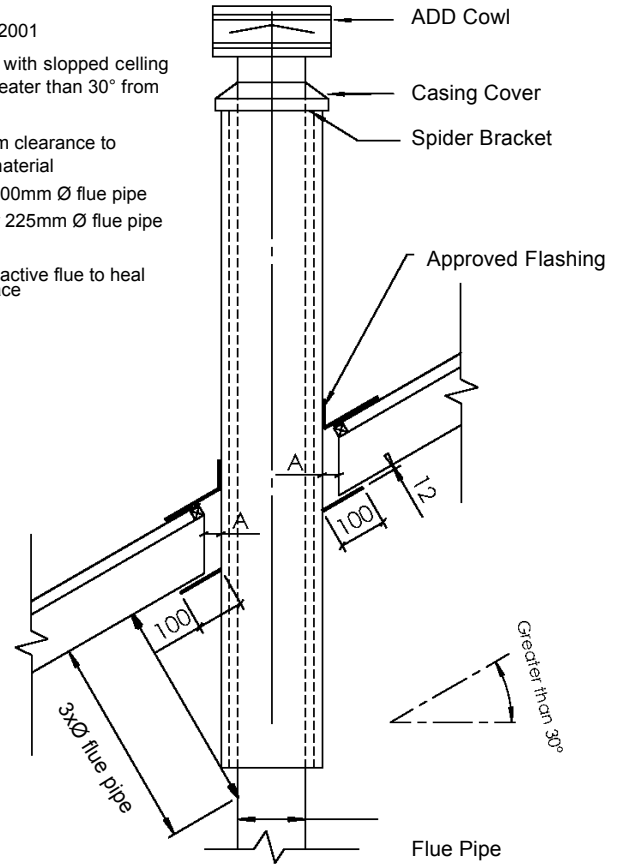

MINIMUM HEIGHT OF FLUE SYSTEM EXIT

